


Product Type: Hat Furring Channel
Product Definition: 087F125-18 33ksi
CSI Code: 09.22.16.13

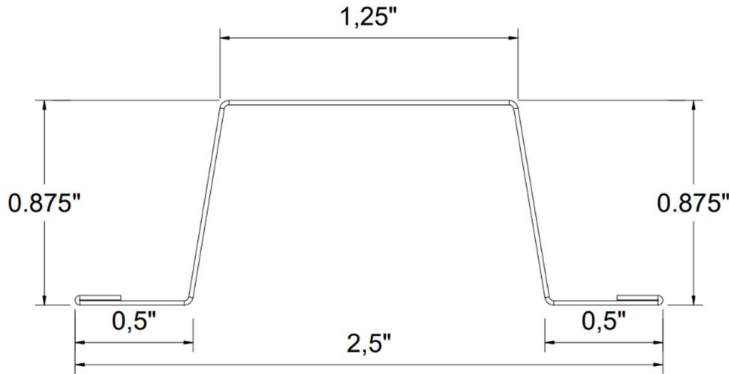

Profile Properties:

Web Depth	0,875 in	Yield Strength:	33 ksi
Flange Width	2,50 in	Cross Sectional Area	0,074 in ²
Design Thickness	0,0188 in	Unit Weight	0,2518 lb/ft
Minimum Thickness	0,0179 in	Finish	G40

Effective Section Properties:

Effective Moment of Inertia for Deflection	I _{xe}	0,006 in ⁴
Allowable Bending Moment	M _a	0,375 in.K

Hat Furring Channel Limiting Ceiling Spans (ft-in):

Load	4 psf			6 psf			13 psf		
	12"	16"	24"	12"	16"	24"	12"	16"	24"
Single	4'-1"	3'-8"	3'-3"	3'-7"	3'-3"	2'-10"	2'-9"	2'-6"	2'-2"
Multiple	5'-6"	5'-0"	4'-5"	4'-10"	4'-5"	3'-10"	3'-9"	3'-5"	3'-0"

Codes & Standards:

- Calculations are based on AISI S220-20 and AISI S100-16.
- Complies with IBC2021, ASTM C645, ASTM C754, ASTM A653, ASTM A1003, ASTM E72
- Intertek Certificate of Compliance No: COC-WHI23-37729201
- LEED / Sustainability Credits: Environmental Product Declaration S-P Code: S-P-00869

Application Areas:

- Furring for walls or ceilings.
- Furring for masonry walls.
- Framing for suspended ceilings.